

FC-R1200L/1500L/1800L FC-F1200L/1500L/1800L

Stainless Steel Undercounter Refrigerators/Freezers Working Top Solid Door Refrigerator or Freezer Features:



- Special Energy Saving Features

   Using DC Powered Evaporator Fan for Higher Efficiency and Energy saving
- Specially designed Defrost system to allow the minimum number of defrost and shortest time for faster efficiency and energy saving
- Specially Designed Sensor system which only turns on the evaporator fan when temperature is cold enough

- Fabricated from the best quality components, designed to perform with the highest efficiency, Economical in pricing, Superior in Food Safety and the best value for the customers
- 439 Series Stainless Steel Doors, c/w the finest finishing. Using Thick Stainless Steel Plates for higher tensile strength, fewer dents and scratches
- Specially Designed Cooling system with high ambient working temperature, allows food to be chilled at a lower temperature for best food preservation and longer times
- Adjustable, Heavy Duty PVC Coated Shelves
- Special Designed Door Gasket, allows "Excellent" Door Sealing Effects and is easy to change and clean
- **Energy Saving System Twin Timer** System Allows Door Frame Heaters to be alternate On n Off, for energy Saving.

# **Side Mounting Compressor Unit Features:**

- Slim Compressor Compartment, for Maximum Storage Space
- Drawer Type Compressor Compartment, which is 100% retractable & Removable for Ease of Servicing
- Supplied with Condensor Filter for Easy Cleaning and Maintenance
- Micro Computer Controlled systems for Easy Monitoring and Functioning

**Data Sheets** Specifications Subjected Change without Notice

Model	Solid	Capacity	# of	Dimensions			HP	Voltage	Weight
	Doors	(Litres)	Shelves	(L X B X H) M			*		
FC-R1200L	2	330	4	1.2	0.75	0.84	1/6	230V/50Hz/1 Ph	100KG
FC-F1200L	2	330	4	1.2	0.75	0.84	1/4	230V/50Hz/1 Ph	110KG
FC-R1500L	2	450	4	1.5	075	0.84	1/4	230V/50Hz/1 Ph	110Kg
FC-F1500L	2	450	4	1.5	0.75	0.84	1/3	230V/50Hz/1 Ph	120Kg
FC-C1800L	3	570	6	1.8	0.75	0.84	1/4	230V/50Hz/1 Ph	125Kg
FC-F1800L	3	570	6	1.8	0.75	0.84	1/3	230V/50Hz/1 Ph	135Kg



Blk 8, Chia Ping Road, #06-15/16, Singapore 619973. Tel: 065-62688898 Fax: 065-62686720 Email: flomatic@singnet.com.sg Website: www.flomaticasia.com



## Design:

- Solid Investment for your long term commitments
- Flomatic is committed to providing the highest quality refrigeration systems made from the finest components, with the highest efficiency


### Refrigeration System:

- Special Engineered, Self Contained Capillary Tube system using Environment Friendly R134a or R404a(CFC Free) Refrigerant
- Oversized Condensor and High Quality Evaporators ensured unit works well in High Ambient Temperature
- Special Designed Cooling system allows unit to maintain food in low temperature for a long period of time, through our High Cooling Efficiency
- High Quality Evaporator fan system with the highest volume of airflow ensures, system cold air is well ventilated.
- Slim Design Compressor Compartment for Maximum Storage Efficiency
- Drawer Type Retractable Compressor Compartment allows ease of servicing and maintenance.

## Computer Controlled System:

- Flomatic Special Designed Computer system allows user to keep track of the refrigerator at all times.
- Energy Saving through the optimized usage of the door frame heaters
- 3 Temperature Sensors systems
- Special Designed Features allows maximum safety to the unit and protects the compressors from shockage.
- User Friendly System c/w alarm to inform user about irregularities

# Specifications Subjected to change without notice\*\* Surcharges will Apply\*\*\*

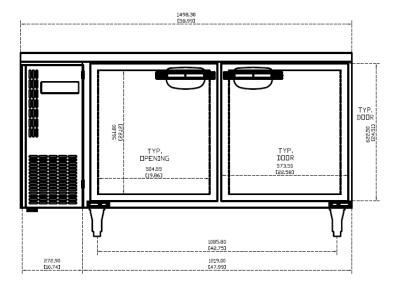

### Body Construction:

- 4mm(T) Thick Hinge Bracket
- SUS430 Finishing for Interior and Exterior, 0.7mm(T)
- 0.5mm(T) Galvanized(Rust Proved) for Back
- 50mm(T) High Density PU Insulation to prevent Sweating
- Frame built from 2mm(T) Galvanized Steel, dipped in anti-Corrosion Paint, to withstand shock and Weight

#### Doors:

- Ergonomical Designed Handles
- SUS439 Finishing for Doors, 0.7mm(T)
- Special Designed Magnetic Door Gaskets, which insulates the unit after door closing, to create "Vacuum" effect
- Easy to change and Clean

# Shelvings:

- 4 adjustable heavy duty PVC coated wire shelves.
- 32 pcs of SUS Shelf Clips
- Shelf Pilaster made of SUS
- Each Shelvings able to support heavy loads


#### **Exterior Features**

- Special Design Micro Computer Digital Readout allows easy reading of temperature
- Evaporator and Condensor are coating with anti-Corrosion materials to extend shelf life.
- Internal LED Lights which illuminate the unit when the door is open. Switch off when the door is closed for energy saving

#### Electrical

Standard 230V/50Hz/1 Ph electrical voltage c/w supply cord
 Optional Features\*\*\*

- S/st Legs
- Castors
- Additional Shelvings
- Other Voltages Upon Request



Warranty: One Year Warranty on Parts Only. Subjected to Final Confirmation. Specifications Subject to Change without Notice.

Blk 8, Chia Ping Road, #06-15/16, Singapore 619973. Tel: 065-62688898 Fax: 065-62686720 Email: flomatic@singnet.com.sg Website: www.flomaticasia.com